

6kW cabinets, 1-3 x MHE

OPUS HE 24-4.5 OC2066 F
OPUS HE 48-6.0 OC2066 F
OPUS HE 60-6.0 OC2066 F
OPUS HE 110-6.0 OC2066 F
OPUS HE 125-6.0 OC2066 F
OPUS HE 220-6.0 OC2066 F

12kW cabinets, 1-6 x MHE


OPUS HE 24-9.0 OC2066 F
OPUS HE 48-12.0 OC2066 F
OPUS HE 60-12.0 OC2066 F
OPUS HE 110-12.0 OC2066 F
OPUS HE 125-12.0 OC2066 F
OPUS HE 220-12.0 OC2066 F

24kW cabinets, 1-12 x MHE


OPUS HE 24-18.0 OC2066 F
OPUS HE 48-24.0 OC2066 F
OPUS HE 60-24.0 OC2066 F
OPUS HE 110-24.0 OC2066 F
OPUS HE 125-24.0 OC2066 F
OPUS HE 220-24.0 OC2066 F



Configurable Load distribution



Battery fuse alternatives



VIDI Controller



MHE Rectifiers 24V-220V

6kW cabinets, 1-3 pcs
12kW cabinets, 1-6 pcs
24kW cabinets, 1-12 pcs

Inverters and DC/DC converters

Configurable Battery shelves

4 shelves, e.g. 1 x 220V string
3 shelves, e.g. 1 x 110V string
2 shelves, e.g. 2x48V or 1x110V
1 shelf, e.g. 2 x 24 or 1 x 48V
No battery shelves



Product Description

OPUS HE power systems are robust, free convection cooled, N+1 redundant backup power solutions for critical infrastructure applications such as transmission and distribution substations, process industries, railway signalling and substations and telecommunications.

OPUS HE DC power systems consist of MHE rectifiers, VIDI+ controllers, Connections for mains and battery and load distribution MCB. System is configurable to match with requirements of the application. On top of 12 configurable relay alarms, system can be remotely monitored via modern communication protocols such as Ethernet TCP/IP, Modbus TCP/IP, SCADA IEC61850, SNMP and RS-232.

OC2066 2000x600x600mm standard cabinet systems deliver maximum 24 kW output power at 48, 60, 110, 125 and 220 VDC and 18 kW at 24 VDC output. Cabinets have standard configurations for 3/6/12 rectifier modules. Quantity of rectifiers, battery fuses, battery shelves, load distribution and many other features are configurable to match with requirements of the application.

Features



- Efficiency up to 97%
- Convection cooling – no fans
- Outputs 24, 48, 60, 110, 125, 220 VDC
- Flexible design with full front cabling
- VIDI+ I/O controller, local and remote interfaces
12 x relays, Ethernet, Modbus, IEC61850, SNMP, RS-232
- Configurable battery shelves, battery connection and load distribution
- Options: IP21 roof, BLVD contactor, battery block voltage monitoring, inverters & DC/DC converters
- Safety:
Cabinet: EN61439-1, EN61439-2
Low voltage switchgear controlgear assemblies
Rectifiers: EN 62368-1, EN 50124-1 rail
- EMC:
Cabinet: EN61439-1, EN61439-2
Rectifiers: EN 61000-6-1 / -2 / -3 / -4 / -5
EN 50121-4 rail, ETSI EN 300386 (48/60V)

Technical Specifications

General construction	
Cooling	Natural convection
Protection	IP 20, Option IP21
Controller user interface	Display and local control in front door & web interface
Cabling	Default top entry Option bottom entry
Colour	Frame RAL 7037, door RAL 7024
Dimensions & weight	Height 12U (533 mm) Width 19" (482 mm) Depth 395 mm Weight 20 kg w/o rectifiers

Environment and standards	
Temp. range	-25 ... +60°C, see derating page 5, Start-up at -40°C
Humidity max	95% relative humidity, non-condensing
Altitude	Max 3km, full power up to 2km above sea level Derating 2% per 100 m between 2-3km
Safety	Cabinet: EN61439-1, EN61439-2 Rectifiers: EN 62368-1, EN 50124-1 rail
EMC	Cabinet: EN61439-1, EN61439-2 Rectifiers: EN61000-6-1 / -2 / -3 / -4 Generic EN61000-6-5 Utility EN 50121-4 Rail, ETSI EN 300 386 (48/60V)

AC Input	
AC connection	TN-S system, 3W + N + PE, (3-phases, neutral and protective earth wires)
Nominal input	220-240 VAC / 3 x 380-415 VAC TN-S system (options: 1-phase 100-250VAC or Delta/IT e.g. 3 x 208VAC)
Input range	Max range: 85 – 300 VAC / 3 x 147–528 VAC Rated full power range: 180 – 275 VAC / 3 x 312–476 VAC (TN-S system) See derating curves below, 1200W per rectifier at 120VAC Temporary high voltage range 275 - 300VAC / 3 x 476 - 528VAC, continuous supply not recommended
Input frequency	Rated 45 - 66 Hz, reduced power at 35 - 45 Hz. Shut down at 35 Hz
Main Switch	63A, 4-pole (L1-L2-L3-N)
Rectifier input protection	MCB C16A / rectifier module
	24V 4.5kW 48V 6kW 60V 6kW 110V 6kW 125V 6kW 220V 6kW
Nominal current	8A @ 220/380V 11A @ 220/380VAC
Maximum phase current	12,5A @ 85-130V 12,5A @ 85-180VAC
Recommended mains fuse	3 x 25 A (TN-S)
	24V 9kW 48V 12kW 60V 12kW 110V 12kW 125V 12kW 220V 12kW
Nominal current	16A @ 220/380V 22A @ 220/380VAC
Maximum phase current	25A @ 85-130V 25A @ 85-180VAC
Recommended mains fuse	3 x 25 A (TN-S)
	24V 18kW 48V 24kW 60V 24kW 110V 24kW 125V 24kW 220V 24kW
Nominal current	32A @ 220/380V 44A @ 220/380VAC
Maximum phase current	50A @ 85-130V 50A @ 85-180VAC
Recommended mains fuse	3 x 50 A (TN-S)


DC Output	24V	48V	60V	110V	125V	220V
Grounding	2-pole, floating					
Nominal voltage	24 VDC	48 VDC	60 VDC	108 VDC	120 VDC	216 VDC
Voltage factory setting, 2.27vpc	27.24 VDC	54.48 VDC	68.10 VDC	122.58 VDC	136.20 VDC	245.16 VDC
Voltage range	21-33 VDC	42-59 VDC	51-72 VDC	90-150 VDC	100-160 VDC	178-280 VDC
Static voltage regulation	± 2 % @ load terminals (load, line, temp)			± 1 % @ load terminals (load, line, temp)		
Rectifier output protection	MCB C63A	MCB C50A	MCB C40A	MCB C20A	MCB C20A	MCB C10A
	24V 4.5kW	48V 6kW	60V 6kW	110V 6kW	125V 6kW	220V 6kW
Quantity of rectifiers	Max 3 pcs					
Max current	187.5A @ 24V	125A @ 48V	100A @ 60V	55.5A @ 108V	50A @ 120V	27.8A @ 216V
Max Power	4.5kW	6kW	6kW	6kW	6kW	6kW
	24V 9kW	48V 12kW	60V 12kW	110V 12kW	125V 12kW	220V 12kW
Quantity of rectifiers	Max 6 pcs					
Max current	375A @ 24V	250A @ 48V	200A @ 60V	111A @ 108V	100A @ 120V	55.5A @ 216V
Max Power	9kW	12kW	12kW	12kW	12kW	12kW
	24V 18kW	48V 24kW	60V 24kW	110V 24kW	125V 24kW	220V 24kW
Quantity of rectifiers	Max 12 pcs					
Max current	750A @ 24V	500A @ 48V	400A @ 60V	222 A @ 108V	200A @ 120V	111A @ 216V
Max Power	18kW	24kW	24kW	24kW	24kW	24kW



Efore Plc
P.O. Box 260 (Linnoitustie 4B), 02601 Espoo, FINLAND
Tel. +358 9 478 466, Fax +358 9 4784 6500
info@efore.com


Battery Connection alternatives

Type A
Battery MCBs in air flow plate

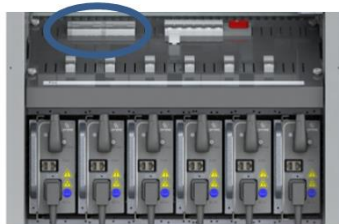


max 125A, 2-pole, 1-3pcs

Type B
Battery MCBs in Battery connection panel

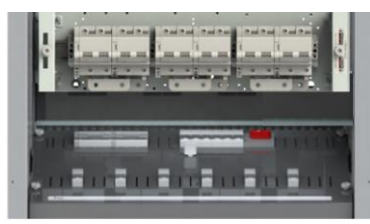


max 250A, 2-pole, 1-3pcs

Type C
Battery MCCBs in Battery connection panel

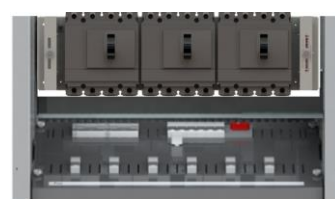


max 460A, 2-pole, 1-3pcs
max 640A, 2-pole, 1-2pcs

Type D
Battery Switch fuses and Load Switch fuses
in combined battery/load connection panel

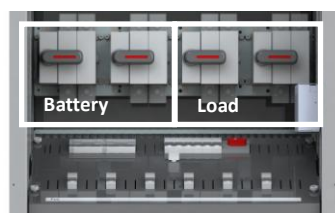

max 125A, 2-pole, 1-2pcs

Type E
Battery Switch fuses in Battery connection panel

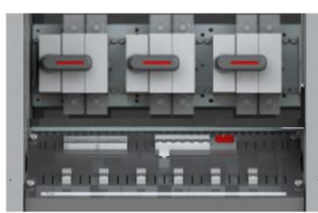

max 250A, 2-pole, 1-3pcs

6kW (4.5kW) cabinets	24V 4.5kW	48V 6kW	60V 6kW	110V 6kW	125V 6kW	220V 6kW
MCB battery fuse version	Type B MCB D200A 2-pole, 1-3pcs	Type A MCB D125A 2-pole, 1-3pcs	Type A MCB D125A 2-pole, 1-3pcs	Type A MCB D63A 2-pole, 1-3pcs	Type A MCB D63A 2-pole, 1-3pcs	Type A MCB D63A 2-pole, 1-3pcs
Switch fuse battery fuse version	Type E NH01 200A 2-pole, 1-2pcs	Type D NH00 125A 2-pole, 1-2pcs	Type D NH00 125A 2-pole, 1-2pcs	Type D NH00 63A 2-pole, 1-2pcs	Type D NH00 63A 2-pole, 1-2pcs	Type D NH00 63A 2-pole, 1-2pcs
Battery shelves	Configurable, 0/1/2/3/4 shelves, 4 height variants 245/275/305/335mm, width 530mm, depth 595mm					

12kW (9kW) cabinets	24V 9kW	48V 12kW	60V 12kW	110V 12kW	125V 12kW	220V 12kW
MCB/MCCB battery fuse version	Type C MCCB 368A 2-pole, 1-3pcs	Type B MCB D250A 2-pole, 1-3pcs	Type B MCB D250A 2-pole, 1-3pcs	Type A MCB D125A 2-pole, 1-3pcs	Type A MCB D125A 2-pole, 1-3pcs	Type A MCB D63A 2-pole, 1-3pcs
Switch fuse version	N/A	Type E NH01 250A 2-pole, 1-3pcs	Type E NH01 250A 2-pole, 1-3pcs	Type D NH00 125A 2-pole, 1-2pcs	Type D NH00 125A 2-pole, 1-2pcs	Type D NH00 63A 2-pole, 1-2pcs
Battery shelves	Configurable, 0/1/2/3/4 shelves, 4 height variants 245/275/305/335mm, width 530mm, depth 595mm					

24kW (18kW) cabinets	24V 18kW	48V 24kW	60V 24kW	110V 24kW	125V 24kW	220V 24kW
MCB/MCCB battery fuse version	Type C MCCB 640A 2-pole, 1-2pcs	Type C MCCB 460A 2-pole, 1-3pcs	Type C MCCB 460A 2-pole, 1-3pcs	Type B MCB D250A 2-pole, 1-3pcs	Type B MCB D250A 2-pole, 1-3pcs	Type A MCB D125A 2-pole, 1-3pcs
Switch fuse version	N/A	N/A	N/A	Type E NH01 250A 2-pole, 1-3pcs	Type E NH01 250A 2-pole, 1-3pcs	Type D NH00 125A 2-pole, 1-2pcs
Battery shelves	Configurable, 0/1/2 shelves, 4 height variants 245/275/305/335mm, width 530mm, depth 595mm					

Battery test option	MCB for external discharging test load
---------------------	--

Load Distribution alternatives



MCB panels



NH00/NH01 fuse panels



Diazed fuse panels



Cylinder fuse panels





Switch fuse panels

Type	Name	Description
	Bulk Output Terminal XL1	Screw terminal 95mm2
	Series diode (Blocking diode) module	Semikron 160A, SKKD 162/16, heatsink P3/180
9200X0009815	LD6HF12MCB	Load Distribution panel 12xMCB 2-pole Max DC voltage 250VDC per pole Schneider C60H-DC series Efore FMU fuse monitoring card
9200X0009819	LD6HF10MCB+AUX	Load Distribution panel 10xMCB 2-pole + aux contact Max DC voltage 250VDC per pole Schneider C60H-DC series
9200X0011397	LD6LF12MCB	Load Distribution panel 12xMCB 2-pole Max DC voltage 72VDC Schneider iC60N series Efore FMU fuse monitoring card
9200X0015243	LD6LF10MCB+AUX	Load Distribution panel 10xMCB 2-pole + aux contact Max DC voltage 72VDC Schneider iC60N series
9200X0009814	LD6LG24MCB	Load Distribution panel 24xMCB 1-pole Max DC voltage 72VDC Schneider iC60N series Efore FMU fuse monitoring card
9200X0015239	LD6 230AC 10 x MCB L+N+AUX	Load Distribution panel 10xMCB 2-pole + aux contact AC 230V distribution Schneider iC60N series
9200X0000134	LCF5 HV 2-p 6xNH000	Load Distribution panel 6xNH000 2-pole Efore DFM fuse monitoring card
9200X0007378	LCF14 HV 2-p 3xNH01	Load Distribution panel 3xNH01 2-pole Efore DFM fuse monitoring card
8320X0004157	LCF11 3XOS125 HV	Load Distribution panel 3 x Switch fuse/NH00 2-pole Fuse monitoring by aux MCB
9200X0008395	LCF15 HV 2-P 8xDIAZED	Load Distribution panel 8 x Diazed fuse 2-pole Efore DFM fuse monitoring card
9200X0010650	LCF16 HV 2-p 12xE92/32PV	Load Distribution panel 12 x Cylinder fuse 10x38 mm 2-pole Efore DFM fuse monitoring card
	Load panel screw terminal option	Terminal row, 12 x 2-pole terminals for distribution panels Screw terminals 10mm ² , top of cabinet (wired)

Connection terminals


Mains terminal	X1 Mains input screw terminal blocks 10 mm ² , L1-L2-L3-N-PE
DC output	See alternatives above, connection to screw terminals or to protection device directly
Battery	See battery connection alternatives Internal battery in cabinet: battery cables included External battery: Screw terminals, top of cabinet (wired)
Alarms, Inputs	Configurable relay alarms 12 pcs, Spring terminals 0.75mm ² ... 1.5mm ² cable Configurable alarm/temp. inputs 12 pcs, Spring terminals 0.75mm ² ... 1.5mm ² cable

Derating curves

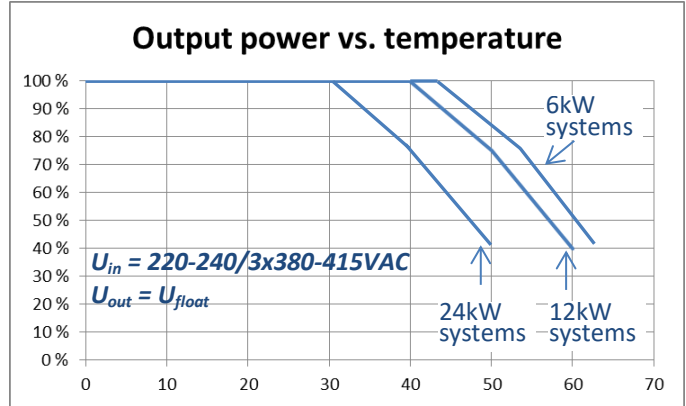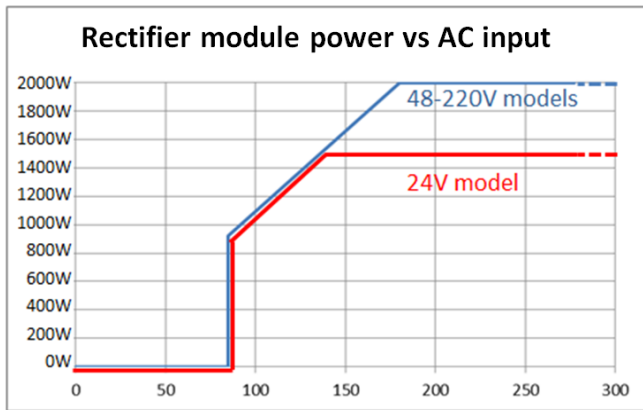


*) Derating curves are continuous power
Short time (<1h) 100% power up to +50°C

Block Diagram, Configurable cabinet options

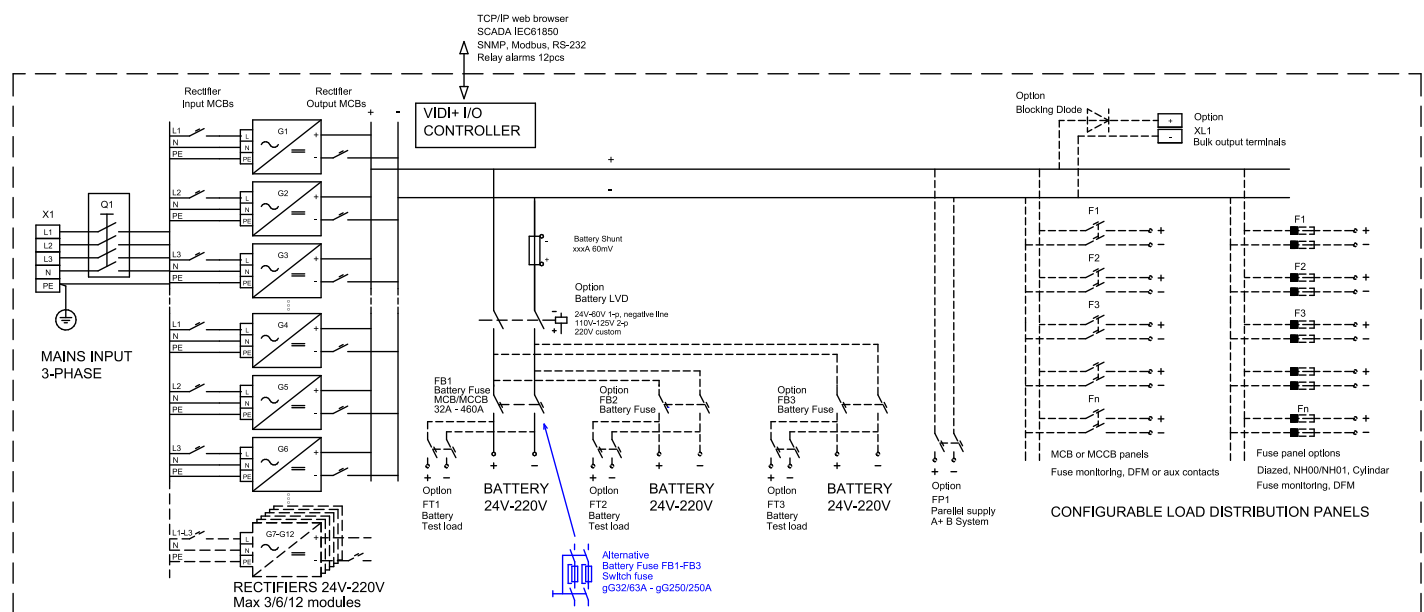

Block Diagram, Example configuration A+B system, inverter and DC/DC converter options

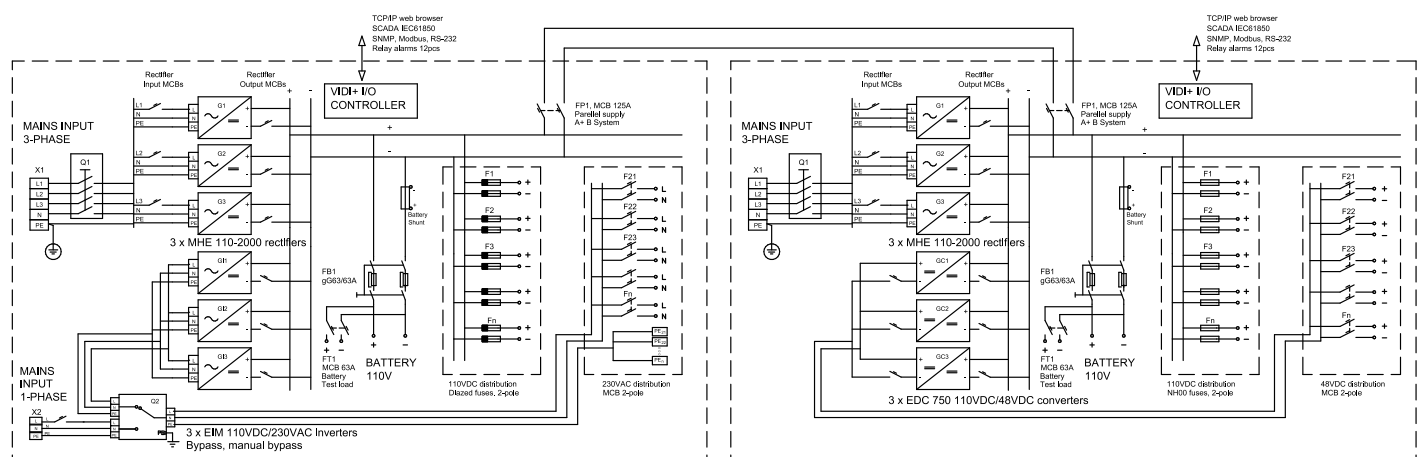

Layout examples, OPUS cabinet systems



OPUS HE 24-18.0 OC2066
24VDC 62.5A – 750A
2 x MCCB 640A battery fuses
Battery & distribution space



OPUS HE 220-12.0 OC2066
220VDC 9.3A – 55.5A
2 x MCB 63A battery fuses
Battery & distribution space



OPUS HE 110-6.0 OC2066
110VDC 18.5A – 111A
Inverter AC power up to 3.6kW
2 x Switch Fuse 125A batt fuses
Battery & distribution space



OPUS HE 48-6.0 OC2066
48VDC 41.7A – 125A
DC/DC Converter up to 3 x 750W
2 x MCB 125A battery fuses
Battery & distribution space



Wall cabinet
OPUS C 24-6.6 OC0864
IP20 800 x 600 x 400 mm
Bulk output
MCB load distribution
Switch fuse battery fuses

Order Information

Cabinet Systems MCB/MCCB battery Fuses	Order Number	Cabinet Systems Switch Fuse battery Fuses	Order Number	Voltage / Current
OPUS HE 24-4.5 OC2066 F MCB	9220X0014580	OPUS HE 24-4.5 OC2066 F SWF	9220X0015773	24VDC / 62.5A – 187.5A
OPUS HE 24-9.0 OC2066 F MCCB	9220X0011284	Custom	N/A	24VDC / 62.5A – 375A
OPUS HE 24-18.0 OC2066 F MCCB	9220X0011285	Custom	N/A	24VDC / 62.5A – 750A
OPUS HE 48-6.0 OC2066 F MCB	9220X0014581	OPUS HE 48-6.0 OC2066 F SWF	9220X0015776	48VDC / 41.7A – 125A
OPUS HE 48-12.0 OC2066 F MCB	9220X0011266	OPUS HE 48-12.0 OC2066 F SWF	9220X0015633	48VDC / 41.7A – 250A
OPUS HE 48-24.0 OC2066 F MCCB	9220X0011267	Custom	N/A	48VDC / 41.7A – 500A
OPUS HE 60-6.0 OC2066 F MCB	9220X0014570	OPUS HE 60-6.0 OC2066 F SWF	9220X0015778	60VDC / 33.3A – 100A
OPUS HE 60-12.0 OC2066 F MCB	9220X0014571	OPUS HE 60-12.0 OC2066 F SWF	9220X0015779	60VDC / 33.3A – 200A
OPUS HE 60-24.0 OC2066 F MCCB	9220X0014572	Custom	N/A	60VDC / 33.3A – 400A
OPUS HE 110-6.0 OC2066 F MCB	9220X0014582	OPUS HE 110-6.0 OC2066 F SWF	9220X0015781	110VDC / 18.5A – 55.5A
OPUS HE 110-12.0 OC2066 F MCB	9220X0015483	OPUS HE 110-12.0 OC2066 F SWF	9220X0011273	110VDC / 18.5A – 111A
OPUS HE 110-24.0 OC2066 F MCB	9220X0011274	OPUS HE 110-24.0 OC2066 F SWF	9220X0015660	110VDC / 18.5A – 222A
OPUS HE 125-6.0 OC2066 F MCB	9220X0014576	OPUS HE 125-6.0 OC2066 F SWF	9220X0015782	125VDC / 16.7A – 50A
OPUS HE 125-12.0 OC2066 F MCB	9220X0014577	OPUS HE 125-12.0 OC2066 F SWF	9220X0015783	125VDC / 16.7A – 100A
OPUS HE 125-24.0 OC2066 F MCB	9220X0014578	OPUS HE 125-24.0 OC2066 F SWF	9220X0015661	125VDC / 16.7A – 200A
OPUS HE 220-6.0 OC2066 F MCB	9220X0014583	OPUS HE 220-6.0 OC2066 F SWF	9220X0015784	220V / 18.5A – 27.8A
OPUS HE 220-12.0 OC2066 F MCB	9220X0011279	OPUS HE 220-12.0 OC2066 F SWF	9220X0015785	220VDC / 18.5A – 55.5A
OPUS HE 220-24.0 OC2066 F MCB	9220X0011280	OPUS HE 220-24.0 OC2066 F SWF	9220X0015662	220VDC / 18.5A – 111A

Battery shelf versions	Order number
H 245mm, W 530mm, D 595mm	8160X0015479
H 275mm, W 530mm, D 595mm	8160X0015218
H 305mm, W 530mm, D 595mm	8160X0015480
H 335mm, W 530mm, D 595mm	8160X0013899

Controllers, Description	Order number
VIDI+ I/O System controller	94G910

Options, Description	Order number
Temperature Sensor	94M268
IP21 Cabinet Roof 50x680x680 mm	9180X0000802
AC over voltage protection KIT 3L-N-PE	8320X0004402

System features
Battery fuse blocks: See page 3 / price list / configuration files
Load distribution: See page 4 / price list / configuration files
Battery discharging test KIT, MCB 63A-250A, see config files
Parallel supply KIT A+B system, MCB 63A-250A, see config files

Options, Description	Order number
VIDI-BM Block voltage monitoring	9040X0002338

Options, Description	Order number
Battery LVD 24V-60V 100-400A 1-P: See price list / configuration	
Battery LVD 110-125V 100-200A 2-P: See price list / configuration	



Efore Plc
P.O. Box 260 (Linnoitustie 4B), 02601 Espoo, FINLAND
Tel. +358 9 478 466, Fax +358 9 4784 6500
info@efore.com